

IMPALA

WAND OPERATED VERTICAL BLIND SYSTEM

GENERAL SPECIFICATION:

The Vertika Impala Vertical Track System is the result of many years of research and technical development that has produced a product suitable for the contract healthcare blind market.

It has been designed for maximum performance and minimum maintenance, allowing consistent operation even with the rigours and occasional abuse in a commercial installation.

The Impala wand operated vertical blind system offer many product benefits.

Ease of operation makes it perfect for hospitals and schools.

Hold the wand and draw the louvres to the side, twist the wand and tilt the louvres to the desired position for perfect shading.

The elimination of sensitive components makes the wand operated Impala system even more user friendly.

Rigid self-aligning design of the travellers makes it almost impossible for the vanes to be knocked out of alignment, maintaining aesthetic appearance.

Aluminium track body provides maximum strength and minimal visual intrusion.


Wheeled louvre carriers provide low friction free operation.

Minimum light gaps between louvre and headrail.

The Vertika product range should be used typically, where high frequency traffic exists or areas where special requirements have to be catered for, i.e. Hospitals, food handling or where there is a potential for cross-contamination by harmful bacteria.

Our new, non-toxic, patent-protected additive, available only from Vertika, inhibits the growth of potentially harmful bacteria and fungi, effectively providing additional hygiene protection for hospital patients, staff and workforces in businesses, particularly in Healthcare, food, and education.

When combined with the Vertika range of fabrics, the Vertika Impala system provides an effective solution to the problems of solar glare and heat gain, and provides the privacy required in a healthcare environment.

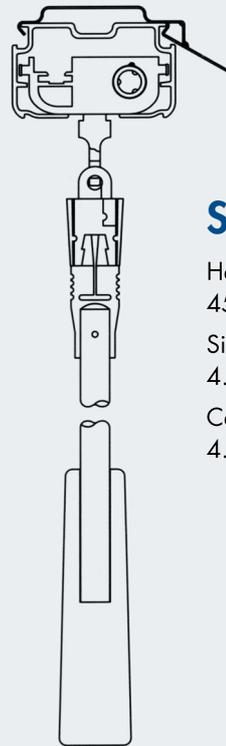

SIZE:

Headrail cross section is 45 mm x 26 mm

Single draw blinds can be 4.5 mm wide maximum.

Centre draw blinds can be 4.0 mm wide maximum.

FEATURES:

No loose hanging cord or chains for safety particularly children.

Wand can be removed for cleaning.

The wand controls both traversing of the louvres and tilt.

Headrail system provides an equal louvre overlap for improved appearance.

Flexible single and split draw options.

Available in white headrail colour.

STANDARD SPECIFICATIONS:

Control Rod

Ø 8.1 mm aluminium alloy with a white powder paint finish.

Handle & connector

The Ø 20 mm x 77 mm long handle is barium sulphate filled polypropylene.

The Ø 11 mm x 35 mm long connector is acetal.

Wand gearbox & connectors

The gearbox is a traveller body 41 mm x 36 mm x 16 mm with a Ø 9 mm x 20 mm long hook. The 56 mm x 49 mm x 1.6 mm connectors are acetal and provide a fixing hole for the gearbox and four variable length fittings for the traveller.