


Vertical Blinds

KVL30T/F – KVL31T/F
KVL60T/F - KVL64T/F
Defiant Kestrel Vertical Blind

FITTING INSTRUCTIONS

KVL30/31/60/64 – vertical blinds

Fig 1.

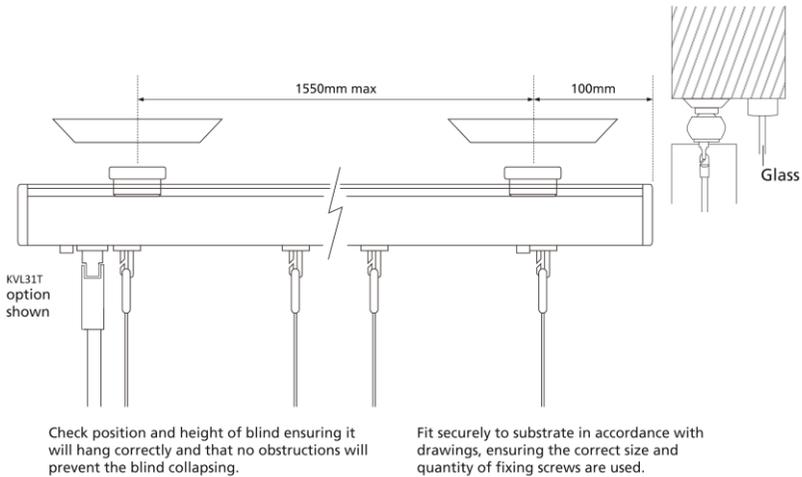

FITTING INSTRUCTIONS

- 1 Check position and height of blind ensuring it will hang correctly and that no obstructions will prevent the blind collapsing.
- 2 Fit securely to substrate in accordance with drawings, Fig 1, ensuring the correct spacing and quantity of brackets are used.
- 3 Fix top or face fix brackets to ceiling or wall using suitable fixing screws/plugs as per shown in fig 3, below. It important that the bracket is securely fixed to the substrate using TWO fixing screws and care must be taken to ensure that no ligature points are left once installation has been completed. If a degree of float is required in the magnet, the packing disc may be discarded.
- 4 If the blind requires to be face fixed and has 89/127mm louvres please fix the packers as shown in fig 2, prior to fitting the face fix brackets. (the number of packers required is governed by the size of the louvres)

- 5 Clip spring clips onto headrail in similar positions to where the Kestrel brackets have been installed already.

Fig 2.





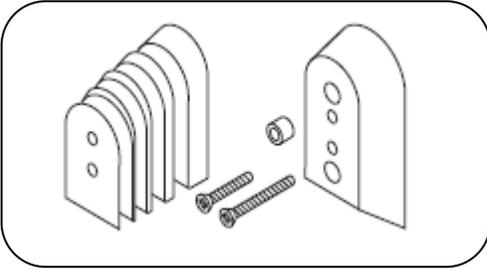


Fig 3.

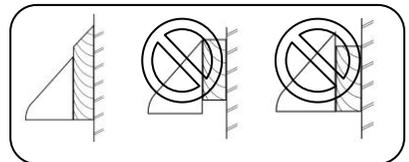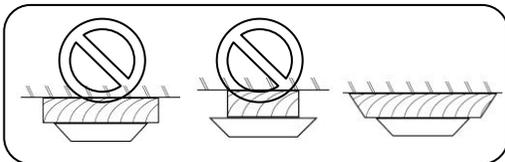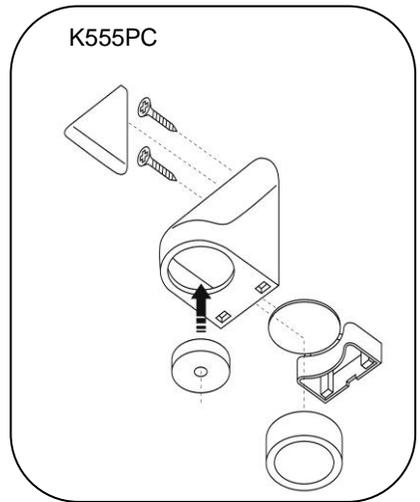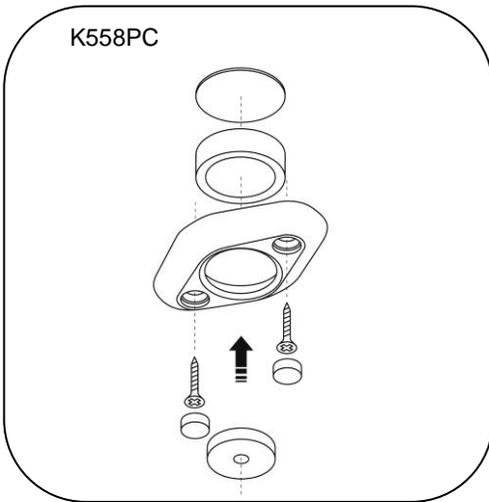

- 6 Lift blind into position and slide spring clips into correct position to locate onto magnets as necessary.
- 7 Once blind is fitted and bracket positioning has been confirmed by testing, the push-in screw cover/s MUST be fitted ensuring that it is flush with the bracket body. The push-in screw cover/s is intended to be a tight fit to prevent unauthorized access to fixings.

ALL BRACKETS

Discs should be horizontal and centre of gravity of load should be directly beneath centre-line of discs. Test completed installation. The downward force needed to part the brackets should never be more than 400N (40kg static load) at any point

WARNING

The magnetic element of the Kestrel bracket is POWERFUL. Handle with care. If allowed to attach to a flat steel surface it may be difficult to remove. DO NOT PLACE NEAR SENSITIVE ELECTRONIC EQUIPMENT.

**SPRUCE
DESIGN** Anti Ligature Services Ltd
S D A L S
6 Abbey view , Liverpool, L16 5EZ
Phone: 01517372525 Fax: 01517372122
Email: Sales@ sprucedesign.com